



Multi Zone Specification

ARU9RML Multizone Wall Mount

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

THE POSSIBILITIES ARE INFINITE

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____


| | | |
|----------------------|---------------|---------------------------|
| Power | V/Hz/P | 230/60/1 |
| Fan type | | Forward Curve |
| No. Motors | (W) | 11-1 |
| CFM [.0 in.WG] | (Hi,Me,Lo) | 294/241/218 |
| CFM [.16 in.WG] | (Hi,Me,Lo) | 250/210/195 |
| Sound Pressure Level | db (Hi,Me,Lo) | 39/35/32 |
| F.L.A. | (A) | .2 |
| Refrigerant | | 410A |
| O.D. Discharge | in (mm) | Ø1/4" (6.35) |
| O.D. Suction | in (mm) | Ø3/8" (9.52) |
| Dimensions | | H x W x D |
| Uncrated | (in) | 8-35/64 x 25-5/8 x 23-1/2 |
| | (mm) | (217 x 650 x 596) |
| Crated | (in) | 12-3/4 x 20-29/32 x 27 |
| | (mm) | (324 x 785 x 686) |
| Weight | | |
| Net | lbs. (kg) | 20 (9.5) |
| Gross Shipping | lbs. (kg) | 26 (12) |

| | | |
|----------------------------------|------------|-----------------------|
| Cooling Capacity | (BTU/h) | 9,500 (5,100-13,000) |
| Moisture Removal | pt/h (l/h) | 1.9 (0.9) |
| Heating Capacity | (BTU/h) | 11,000 (5,100-13,000) |
| Temperature Setting Range | | |
| Cooling | °F(°C) | 64~90 (18~32) |
| Heating | °F(°C) | 60~80 (16~31) |
| Drain Pipe Size** | OD in (mm) | Ø1-1/32 (26) |
| | ID in (mm) | Ø27/32 (21.5) |
| Remote Control Type | | Wired |
| Electrical Connection* | AWG | 14/3 with ground |

*Power and communication are fed from the outdoor unit.
 **Adapter to 3/4" PVC included with unit.



Q-h Characteristic curve

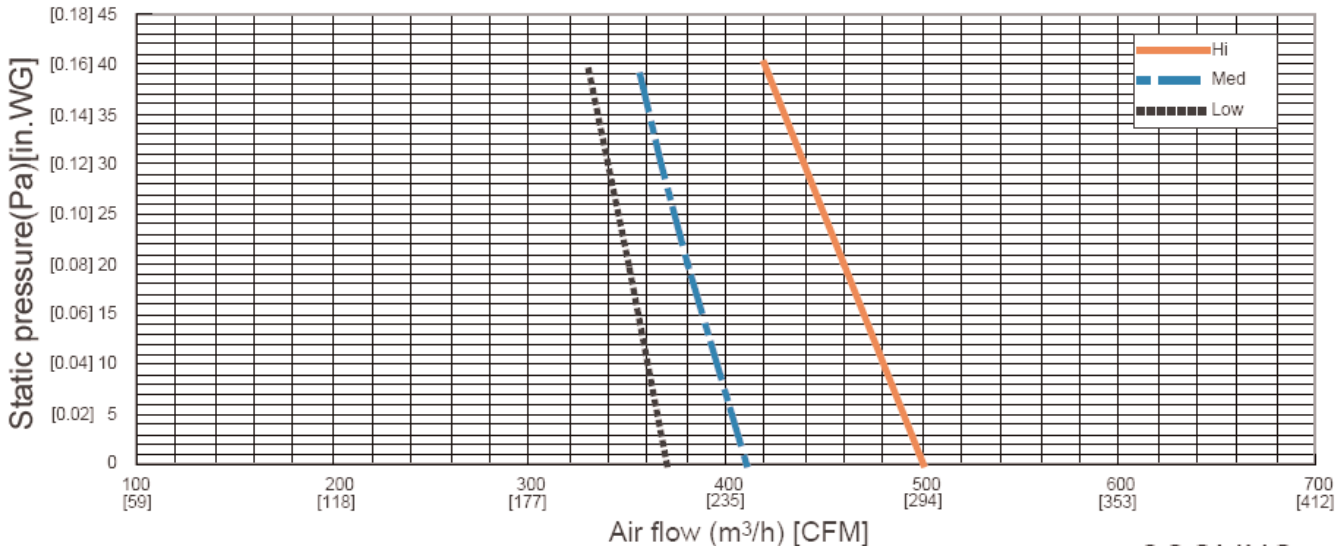

Fujitsu General America, Inc.
 Fairfield, NJ 07004
 Toll Free: 1-888-888-3424
 Fax: (973) 836-0447
 www.fujitsugeneral.com

Note:
 Specifications are based on the following conditions.
 Power source of specifications : 230V
 Cooling: Indoor temperature of 80°F(26.67°C)DB / 67°F(19.44°C)WB, and outdoor temperature of 95°F(35°C)DB/75°F(23.89°C)WB.
 Heating: Indoor temperature of 70°F(21.11°C)DB / 60°F(15.56°C)WB, and outdoor temperature of 47°F(8.33°C)DB/43°F(6.11°C)WB.
 Pipe length : 24ft. 7in.(7.5m), Height difference : 0 ft.(0m) [Outdoor unit - Indoor unit]
 Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.

