

Submittal Data: System 18CL ASU18CL & AOU18CL



Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____

OUTLINE AND DIMENSIONS

Capacities:

Cooling	18,000 BTU/h
Min/Max Cooling	5,500/19,000BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
SEER	19.0
EER	10.4
Low Ambient Temp. <i>F°</i>	14
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level <i>db (A) - H/ M/ L/ Q</i>	44/38/32/25
Weight	20 lbs.


Outdoor Unit:

Noise Level <i>db (A)</i>	50
Recommended Fuse Size	20A
Min. Ampacity	16A
Running Current <i>(Rated/Max)</i>	7.7/9.0
Weight	88 lbs.

Refrigerant Piping:

Max Ht. Difference	49 ft.
Max Total or Combined Length	66 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	1/2 in.

Note: Figures are based on 230 Volts

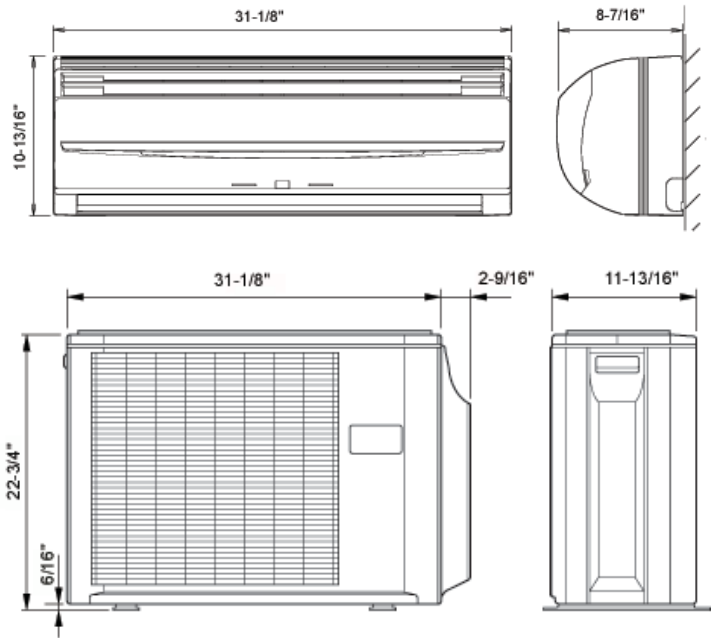

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Refrigerant R410A
- ◆ Auto Mode; Quiet Mode
- ◆ Auto Louver: Up/Down
- ◆ Apple Catechin Filter
- ◆ Auto Changeover
- ◆ Digital Wireless Remote Control
- ◆ Sleep timer; 24 hour timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Dry Mode; Coil Dry Mode
- ◆ Cold Prevention
- ◆ Ion Deodorizing Filter
- ◆ Optional Wired Remote Control

Notes:
