

# Submittal Data: System 30CLX ASU30CLX & AOU30CLX



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
 Submitted By: \_\_\_\_\_

## OUTLINE AND DIMENSIONS

### Capacities:

Cooling	30,700 BTU/h
Min/Max Cooling	9,900-32,400BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
SEER	15.0
EER	8.9
Low Ambient Temp. <i>F°</i>	14
Voltage/Frequency/Phase	208-230/60/1

### Indoor Unit:

Noise Level <i>db (A) - H/ M/ L/ Q</i>	47/41/36/32
Weight	31 lbs.


### Outdoor Unit:

Noise Level <i>db (A)</i>	53
Recommended Fuse Size	30A
Min. Ampacity	22A
Running Current ( <i>Rated/Max</i> )	15.2/18.0
Weight	137 lbs.

### Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	164 ft.
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

**Note: Figures are based on 230 Volts**

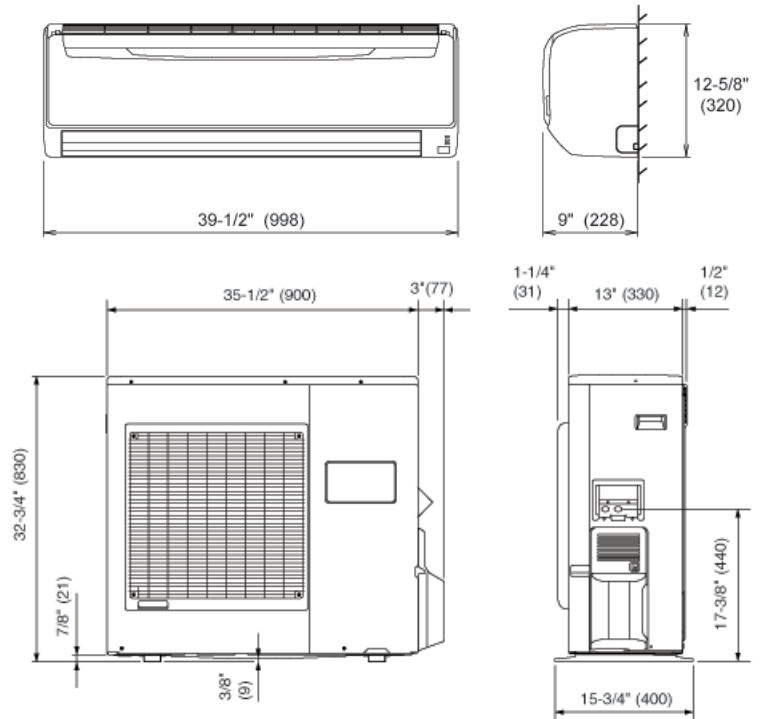

### Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Refrigerant R410A
- ◆ Auto Louver: 4 Way
- ◆ Auto Mode; Quiet Mode; Dry Mode
- ◆ Ion Deodorizing Filter
- ◆ Digital Wireless Remote Control
- ◆ Sleep timer; 24 hour timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Cold Prevention
- ◆ Power Diffuser
- ◆ Apple Catechin Filter
- ◆ Optional Wired Remote Control

### Notes:

---



---



---