


Slim Duct Built-in



FDXS




RXS



ARC



Standard Efficiency - SEER 13 Heat Pump

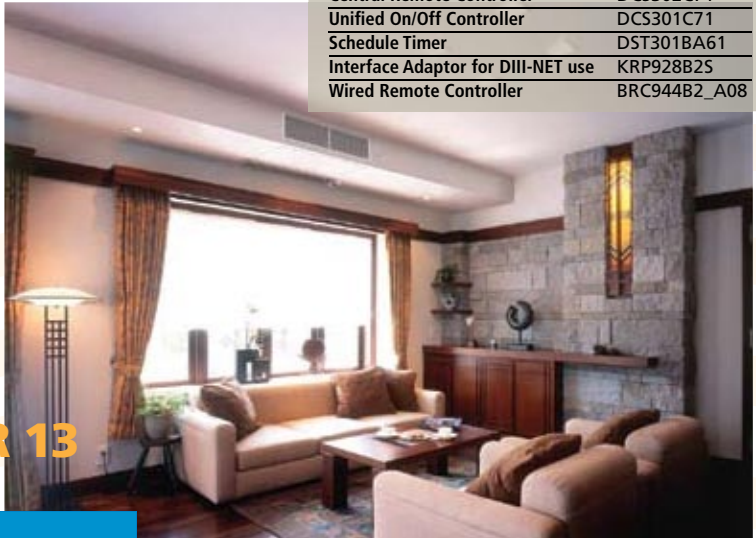

Controllers (Options)



Central Remote Controller	DCS302C71
Unified On/Off Controller	DCS301C71
Schedule Timer	DST301BA61
Interface Adaptor for DIII-NET use	KRP928B2S
Wired Remote Controller	BRC944B2_A08

Indoor Units - FDXS_DVJU

Model		FDXS09DVJU	FDXS12DVJU
Refrigerant		R-410A	R-410A
Front Panel Color		Off-White	Off-White
Cooling Capacity (min./rated/max.)	Btu/h	4,400/8,500/8,500	4,800/11,500/11,500
Heating Capacity (min./rated/max.)	Btu/h	4,400/10,000/10,000	4,800/11,500/11,500
Moisture Removal	Pt/h	2.5	4.0
Airflow-Wet (H/M/L)	cfm	305/280/260	305/280/260
Airflow-Dry (H/M/L)	cfm	305/280/260	305/280/260
Sound Pressure Level - Cooling (H/M/L)	dB(A)	35/33/31	35/33/31
Sound Pressure Level - Heating (H/M/L)	dB(A)	35/33/31	35/33/31
Condensate Drain Connection (O.D.)	in.	ø 1-1/32	ø 1-1/32
Dimensions (H x W x D)	in.	7-7/8 x 27-9/16 x 24-7/16	
Net Weight	lbs.	47	47
Gross Weight	lbs.	64	64
Wireless Remote Controller (standard)		ARC433A63	ARC433A63
Wired Remote Controller (optional) with 26 ft. cable		BRC944B2-A08	BRC944B2-A08
Optional Condensate Pump		DACA-CP1-1	DACA-CP1-1

Outdoor Units - RXS_DAVJU

Model		RXS09DAVJU	RXS12DAVJU
Casing Color		Ivory White	Ivory White
Refrigerant		R-410A	R-410A
Power Source		1ph 208/230V 60Hz	1ph 208/230V 60Hz
Max. Fuse Size	A	15	15
Compressor Type		Hermetically sealed swing type compressor	
Compressor Motor Output	W	600	600
Power Consumption-Cooling (system)	W	770	1,290
Power Consumption-Heating (system)	W	950	960
Operating Current-Cooling (system)	A	4.2	5.9
Operating Current-Heating (system)	A	4.5	4.6
Sound Pressure Level (cooling/heating)	dB(A)	48/49	49/51
Operating Range-Cooling (outdoor)	°F DB	14 - 115	14 - 115
Operating Range-Cooling (outdoor) (with optional wind baffle)	°F DB	0 - 115	0 - 115
Operating Range-Heating	°F DB	5 - 77	5 - 77
Operating Range-Heating (outdoor) (with optional wind baffle)	°F DB	0 - 77	0 - 77
Pipe Connections-Liquid (flare type)	in.	ø 1/4	ø 1/4
Pipe Connections-Gas (flare type)	in.	ø 3/8	ø 3/8
Refrigerant Charge	lbs.	1.76	2.2
Max. Piping Length	ft.	65	65
Piping Length (no add'l refrigerant)	ft.	33.0	33.0
Max. Height Difference	ft.	49	49
Dimensions (H x W x D)	in.	21-5/8 x 30-1/8 x 11-1/4	
Net Weight	lbs.	74	80
Gross Weight	lbs.	86	92
Condenser Mounting Bracket Accessory		DACA-WB-3	DACA-WB-3

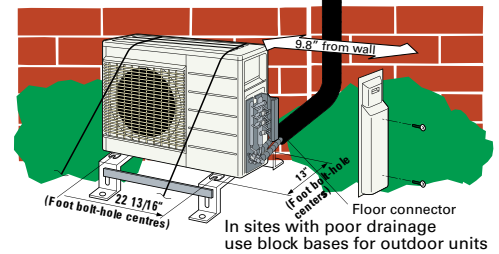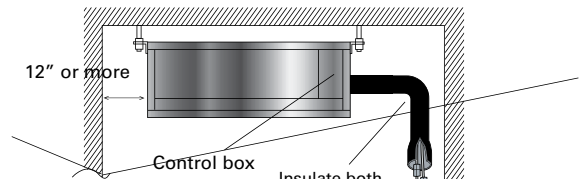

DACA-CP1-1 (Optional condensate pump)

Certified Efficiency Performance Values

AHRI Number	Outdoor Model	Indoor Model	EER	SEER	COP	HSPF
3208515	RXS09DAVJU	FDXS09DVJU	10.90	13.00	3	7.70
3208514	RXS12DAVJU	FDXS12DVJU	8.85	13.00	3.5	7.70

Wall Mounted Indoor Units



FTKN / FTXN



RKN / RXN



ARC



Controllers (Options)

Interface Adaptor for Wired Remote Controller	KRP980B1
Wired Remote Controller	BRC944B2 A08

Standard Efficiency - SEER 13 Cooling Only

Standard Efficiency - SEER 13 Heat Pump

Indoor Units - FTKN_JEVJU

Model		FTKN09JEVJU	FTKN12JEVJU
Refrigerant		R-410A	R-410A
Front Panel Color		Off-White	Off-White
Cooling Capacity (min./rated/max.)	Btu/h	4,400/8,500/9,500	4,400/10,000/12,000
Sensible Cooling Capacity	Btu/h	5,270	6,460
Airflow-Wet (H/M/L/SL)	cfm	325/261/187/141	328/272/198/155
Sound Pressure Level - Cooling (H/M/L/SL)	dB(A)	40/33/26/22	41/34/27/23
Condensate Drain Connection (O.D.)	in.	ø 5/8	ø 5/8
Dimensions (H x W x D)	in.	11-1/8 x 30-1/4 x 7-3/4	
Net Weight	lbs.	16	16
Gross Weight	lbs.	24	24
Wireless Remote Controller (standard)		ARC452A14	ARC452A14
Wired Remote Controller (optional) with 26 ft. cable		BRC944B2-A08	BRC944B2-A08
Optional Condensate Pump		DACA-CP1-1	DACA-CP1-1

Indoor Units - FTXN_JEVJU

Model		FTXN09JEVJU	FTXN12JEVJU
Refrigerant		R-410A	R-410A
Front Panel Color		Off-White	Off-White
Cooling Capacity (min./rated/max.)	Btu/h	4,400/8,500/9,500	4,400/10,000/12,000
Sensible Cooling Capacity	Btu/h	5,270	6,460
Heating Capacity (min./rated/max.)	Btu/h	4,400/10,000/11,600	4,400/12,000/16,400
Heating Capacity (at 17°F)	Btu/h	5,300	6,500
Airflow-Wet (H/M/L/SL)	cfm	325/261/187/141	328/272/198/155
Airflow-Dry (H/M/L/SL)	cfm	342/286/226/198	357/297/237/208
Sound Pressure Level - Cooling (H/M/L/SL)	dB(A)	40/33/26/22	41/34/27/23
Sound Pressure Level - Heating (H/M/L/SL)	dB(A)	40/34/28/25	41/35/29/26
Condensate Drain Connection (O.D.)	in.	ø 5/8	ø 5/8
Dimensions (H x W x D)	in.	11-1/8 x 30-1/4 x 7-3/4	
Net Weight	lbs.	16	16
Gross Weight	lbs.	24	24
Wireless Remote Controller (standard)		ARC452A12	ARC452A12
Wired Remote Controller (optional) with 26 ft. cable		BRC944B2-A08	BRC944B2-A08
Optional Condensate Pump		DACA-CP1-1	DACA-CP1-1

Outdoor Units - RKN_JEVJU

Model		RKN09JEVJU	RKN12JEVJU
Casing Color		Ivory White	Ivory White
Refrigerant		R-410A	R-410A
Power Source		1ph 208/230V 60Hz	1ph 208/230V 60Hz
Max. Fuse Size	A	15	15
Compressor Type		Hermetically sealed swing type compressor	
Compressor Motor Output	W	750	750
Power Consumption-Cooling (system)	W	795	945
Operating Current-Cooling (system)	A	4.6-4.1	4.8-4.4
Sound Pressure Level (cooling)	dB(A)	49	50
Operating Range-Cooling (outdoor)	°F DB	50 - 115	50 - 115
Pipe Connections-Liquid (flare type)	in.	ø 1/4	ø 1/4
Pipe Connections-Gas (flare type)	in.	ø 3/8	ø 3/8
Refrigerant Charge	lbs.	2.20	2.20
Max. Piping Length	ft.	49	49
Piping Length (no add'l refrigerant)	ft.	33	33
Max. Height Difference	ft.	39	39
Dimensions (H x W x D)	in.	21-5/8 x 25-7/8 x 10-7/8	
Net Weight	lbs.	66	66
Gross Weight	lbs.	76	76
Condenser Mounting Bracket Accessory		DACA-WB-3	DACA-WB-3

Outdoor Units - RXN_JEVJU

Model		RXN09JEVJU	RXN12JEVJU
Casing Color		Ivory White	Ivory White
Refrigerant		R-410A	R-410A
Power Source		1ph 208/230V 60Hz	1ph 208/230V 60Hz
Max. Fuse Size	A	15	15
Compressor Type		Hermetically sealed swing type compressor	
Compressor Motor Output	W	750	750
Power Consumption-Cooling (system)	W	795	945
Power Consumption-Heating (system)	W	865	1,050
Operating Current-Cooling (system)	A	4.6-4.1	4.8-4.4
Operating Current-Heating (system)	A	4.6-4.2	5.4-4.9
Sound Pressure Level (cooling/heating)	dB(A)	49/50	50/51
Operating Range-Cooling (outdoor)	°F DB	50 - 115	50 - 115
Operating Range-Heating (outdoor)	°F DB	5 - 77	5 - 77
Pipe Connections-Liquid (flare type)	in.	ø 1/4	ø 1/4
Pipe Connections-Gas (flare type)	in.	ø 3/8	ø 3/8
Refrigerant Charge	lbs.	2.20	2.20
Max. Piping Length	ft.	49	49
Piping Length (no add'l refrigerant)	ft.	33	33
Max. Height Difference	ft.	39	39
Dimensions (H x W x D)	in.	21-5/8 x 25-7/8 x 10-7/8	
Net Weight	lbs.	68	68
Gross Weight	lbs.	78	78
Condenser Mounting Bracket Accessory		DACA-WB-3	DACA-WB-3

Certified Efficiency Performance Values

AHRI Number	Outdoor Model	Indoor Model	EER	SEER
3698117	RKN09JEVJU	FTKN09JEVJU	10.7	13.0
3698118	RKN12JEVJU	FTKN12JEVJU	10.6	13.0

Certified Efficiency Performance Values

AHRI Number	Outdoor Model	Indoor Model	EER	SEER	COP	HSPF
3696642	RXN09JEVJU	FTXN09JEVJU	10.7	13.0	3.39	8.0
3696643	RXN12JEVJU	FTXN12JEVJU	10.6	13.0	3.35	8.0

*Not available on FTKN models




FTXS



RX



ARC

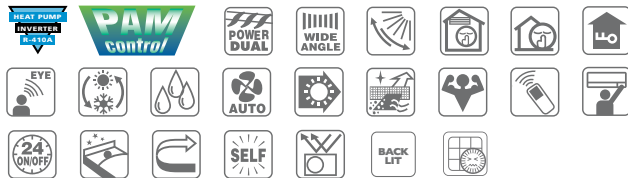

Standard Efficiency - SEER 13 Heat Pump

Indoor Units - FTXS_HVJU Wall Mounted Units

Model	FTXS15HVJU	FTXS18HVJU	FTXS24HVJU
Refrigerant	R-410A	R-410A	R-410A
Front Panel Color	Off-White	Off-White	Off-White
Cooling Capacity (min./rated/max.)	Btu/h 6,800/15,000/15,000	6,800/18,000/18,000	7,500/22,000/22,000
Heating Capacity (min./rated/max.)	Btu/h 6,800/18,000/21,200	6,800/21,600/24,000	7,500/24,000/25,400
Moisture Removal	Pt/h 3.4	4.3	6.3
Airflow-Wet (H/M/L)	cfm 519/436/353	549/476/402	536/473/409
Airflow-Dry (H/M/L)	cfm 515/459/402	609/529/448	586/532/477
Sound Pressure Level - Cooling (H/M/L)	dB(A) 45/41/36	45/41/36	46/42/37
Sound Pressure Level - Heating (H/M/L)	dB(A) 44/40/35	44/40/35	46/42/37
Condensate Drain Connection (O.D.)	in. ø 11/16	ø 11/16	ø 11/16
Dimensions (H x W x D)	in. 11 7/16 x 41 5/16 x 9 3/8		
Net Weight	lbs. 26.5	26.5	26.5
Gross Weight	lbs. 38	38	38
Wireless Remote Controller (standard)	ARC452A9	ARC452A9	ARC452A9
Wired Remote Controller (optional) with 26 ft. cable	BRC944B2_A08	BRC944B2_A08	BRC944B2_A08
Optional Condensate Pump	DACA-CP1-1	DACA-CP1-1	DACA-CP1-1



Outdoor Units - RX_FVJU

Model	RX15FVJU	RX18FVJU	RX24FVJU
Casing Color	Ivory White	Ivory White	Ivory White
Refrigerant	R-410A	R-410A	R-410A
Power Source	1ph 208/230V 60Hz	1ph 208/230V 60Hz	1ph 208/230V 60Hz
Max. Fuse Size	A 20	20	20
Compressor Type	Hermetically sealed swing type compressor		
Compressor Motor Output	W 1,500	1,500	1,900
Power Consumption-Cooling (system)	W 1,360	1,750	2,600
Power Consumption-Heating (system)	W 1,730	2,200	2,850
Operating Current-Cooling (system)	A 6.01	7.67	11.35
Operating Current-Heating (system)	A 7.58	9.58	12.43
Sound Pressure Level (cooling/heating)	dB(A) 51/51	51/51	54/54
Operating Range-Cooling (outdoor)	°F DB 14 - 115	14 - 115	14 - 115
Operating Range-Cooling (outdoor) (with optional wind baffle)	°F DB 14 - 115	14 - 115	14 - 115
Operating Range-Heating (outdoor)	°F DB 5 - 77	5 - 77	5 - 77
Operating Range-Heating (outdoor) (with optional wind baffle)	°F DB 5 - 77	5 - 77	5 - 77
Pipe Connections-Liquid (flare type)	in. ø 1/4	ø 1/4	ø 1/4
Pipe Connections-Gas (flare type)	in. ø 1/2	ø 1/2	ø 5/8
Refrigerant Charge	lbs. 3.75	3.75	3.75
Max. Piping Length	ft. 98.4	98.4	98.4
Piping Length (no add'l refrigerant)	ft. 33	33	33
Max. Height Difference	ft. 66	66	66
Dimensions (H x W x D)	in. 28-15/16 x 32-1/2 x 11-13/16		
Net Weight	lbs. 117	117	121
Gross Weight	lbs. 132	132	137
Condenser Mounting Bracket Accessory	DACA-WB-3	DACA-WB-3	DACA-WB-3

Certified Efficiency Performance Values

AHRI Number	Outdoor Model	Indoor Model	EER	SEER	COP	HSPF
3208518	RX15FVJU	FTXS15HVJU	11.0	13.0	3.05	7.7
3208519	RX18FVJU	FTXS18HVJU	10.3	13.0	2.88	7.7
3208520	RX24FVJU	FTXS24HVJU	8.5	13.0	2.47	7.7

Controllers (Options)

Central Remote Controller	DCS302C71
Unified On/Off Controller	DCS301C71
Schedule Timer	DST301BA61
Interface Adaptor for DIII-NET use	KRP928B2S
Wired Remote Controller	BRC944B2_A08



DACA-CP1-1 (Optional condensate pump)



FTXS



RXS15/18/24



ARC



RXS09/12



Combination of RXS15DVJU and FTXS15HVJU is Energy Star rated

Controllers (Options)

Central Remote Controller	DCS302C71
Unified On/Off Controller	DCS301C71
Schedule Timer	DST301BA61
Interface Adaptor for DIII-NET use	KRP928B25
Wired Remote Controller	BRC944B2_A08



High Efficiency - SEER 15+ Heat Pump


Indoor Units - FTXS_HVJU Wall Mounted Units

Model	FTXS09HVJU	FTXS12HVJU	FTXS15HVJU	FTXS18HVJU	FTXS24HVJU
Refrigerant	R-410A	R-410A	R-410A	R-410A	R-410A
Front Panel Color	Off-White	Off-White	Off-White	Off-White	Off-White
Cooling Capacity (min./rated/max.)	Btu/h 4,400/8,500/9,500	4,800/11,500/12,000	3,200/15,000/15,000	3,200/18,000/18,000	3,200/22,000/22,000
Heating Capacity (min./rated/max.)	Btu/h 4,400/10,000/11,000	4,800/11,500/13,000	3,200/18,000/21,200	3,200/21,600/24,000	3,200/24,000/25,400
Moisture Removal	Pt/h 2.3	3.2	3.4	4.3	6.3
Airflow-Wet (H/M/L)	cfm 246/197/148	242/195/148	519/436/353	549/476/402	536/473/409
Airflow-Dry (H/M/L)	cfm 253/220/187	286/237/187	515/459/402	609/529/448	586/532/477
Sound Pressure Level - Cooling (H/M/L)	dB(A) 38/32/25	40/33/26	45/41/36	45/41/36	46/42/37
Sound Pressure Level - Heating (H/M/L)	dB(A) 38/33/28	39/34/29	44/40/35	44/40/35	46/42/37
Condensate Drain Connection (O.D.)	in. ø 11/16	ø 11/16	ø 11/16	ø 11/16	ø 11/16
Dimensions (H x W x D)	in. 10 3/4 x 30 7/8 x 7 11/16		11 7/16 x 41 5/16 x 9 3/8		
Net Weight	lbs. 16.6	16.6	26.5	26.5	26.5
Gross Weight	lbs. 25	25	38	38	38
Wireless Remote Controller (standard)	ARC452A7	ARC452A7	ARC452A9	ARC452A9	ARC452A9
Wired Remote Controller (optional) with 26 ft. cable	BRC944B2_A08	BRC944B2_A08	BRC944B2_A08	BRC944B2_A08	BRC944B2_A08
Optional Condensate Pump	DACA-CP1-1	DACA-CP1-1	DACA-CP1-1	DACA-CP1-1	DACA-CP1-1

Outdoor Units - RXS_D(A)VJU

Model	RXS09DAVJU	RXS12DAVJU	RXS15DVJU	RXS18DVJU	RXS24DVJU
Casing Color	Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Refrigerant	R-410A	R-410A	R-410A	R-410A	R-410A
Power Source	1ph 208/230V 60Hz	1ph 208/230V 60Hz	1ph 208/230V 60Hz	1ph 208/230V 60Hz	1ph 208/230V 60Hz
Max. Fuse Size	A 15	15	20	20	20
Compressor Type	Hermetically sealed swing type compressor				
Compressor Motor Output	W 600	600	1,500	1,500	1,900
Energy Efficiency	SEER 16.0	16.0	17.0	16.3	15.0
Energy Efficiency	HSPF 8.8	8.8	10.1	9.1	9.2
Power Consumption-Cooling (system)	W 770	1,236	1,230	1,590	2,360
Power Consumption-Heating (system)	W 1,070	1,000	1,570	2,000	2,590
Operating Current-Cooling (system)	A 4.13	5.51	5.44	6.97	10.3
Operating Current-Heating (system)	A 4.98	4.73	6.88	8.71	11.3
Sound Pressure Level (cooling/heating)	dB(A) 48/49	49/51	51/51	51/51	54/54
Operating Range-Cooling (outdoor)	°F DB 14 - 115	14 - 115	14 - 115	14 - 115	14 - 115
Operating Range-Cooling (outdoor) (with optional wind baffle)	°F DB 0 - 115	0 - 115	0 - 115	0 - 115	0 - 115
Operating Range-Heating (outdoor)	°F DB 5 - 77	5 - 77	5 - 77	5 - 77	5 - 77
Operating Range-Heating (outdoor) (with optional wind baffle)	°F DB 0 - 77	0 - 77	0 - 77	0 - 77	0 - 77
Pipe Connections-Liquid (flare type)	in. ø 1/4	ø 1/4	ø 1/4	ø 1/4	ø 1/4
Pipe Connections-Gas (flare type)	in. ø 3/8	ø 3/8	ø 1/2	ø 1/2	ø 5/8
Refrigerant Charge	lbs. 1.76	2.2	3.75	3.75	3.75
Max. Piping Length	ft. 65	65	98	98	98
Piping Length (no add'l refrigerant)	ft. 33	33	33	33	33
Max. Height Difference	ft. 49	49	65.6	65.6	65.6
Dimensions (H x W x D)	in. 21-5/8 x 30-1/8 x 11-1/4		28-15/16 x 32-1/2 x 11-13/16		
Net Weight	lbs. 74	80	117	117	121
Gross Weight	lbs. 86	92	133	133	137
Condenser Mounting Bracket Accessory	DACA-WB-3	DACA-WB-3	DACA-WB-3	DACA-WB-3	DACA-WB-3

RXS09/RXS12 installation space

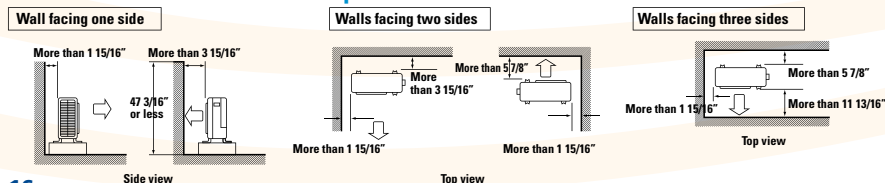

Certified Efficiency Performance Values

AHRI Number	Outdoor Model	Indoor Model	EER	SEER	COP	HSPF
3208512	RXS09DAVJU	FTXS09HVJU	11.0	16.0	2.74	8.8
3208510	RXS12DAVJU	FTXS12HVJU	9.3	16.0	3.37	8.8
3208511	RXS15DVJU	FTXS15HVJU	12.2	17.0	3.36	10.1
3208509	RXS18DVJU	FTXS18HVJU	11.3	16.3	3.17	9.1
3208513	RXS24DVJU	FTXS24HVJU	9.3	15.0	2.72	9.2



FTKS / FTXS



RKS / RXS



ARC



Controllers (Options)

Interface Adaptor for Wired Remote Controller	KRP980B1
Wired Remote Controller	BRC944B2_A08

High Efficiency - SEER 18 Cooling Only



High Efficiency - SEER 18 Heat Pump



Indoor Units - FTKS_JEVJU

Model	FTKS09JEVJU	FTKS12JEVJU
Refrigerant	R-410A	R-410A
Front Panel Color	Off-White	Off-White
Cooling Capacity (min./rated/max.)	Btu/h 4,400/8,500/9,500	4,400/10,000/12,000
Sensible Cooling Capacity	Btu/h 5,320	6,520
Airflow-Wet (H/M/L/SL)	cfm 325/261/187/141	328/272/198/155
Sound Pressure Level - Cooling (H/M/L/SL)	dB(A) 40/33/26/22	41/34/27/23
Condensate Drain Connection (O.D.)	in. ø 5/8	ø 5/8
Dimensions (H x W x D)	in. 11-1/8 x 30-1/4 x 7-3/4	
Net Weight	lbs. 16	16
Gross Weight	lbs. 24	24
Wireless Remote Controller (standard)	ARC452A14	ARC452A14
Wired Remote Controller (optional) with 26 ft. cable	BRC944B2-A08	BRC944B2-A08
Optional Condensate Pump	DACA-CP1-1	DACA-CP1-1

Indoor Units - FTXS_JEVJU

Model	FTXS09JEVJU	FTXS12JEVJU
Refrigerant	R-410A	R-410A
Front Panel Color	Off-White	Off-White
Cooling Capacity (min./rated/max.)	Btu/h 4,400/8,500/9,500	4,400/10,000/12,000
Sensible Cooling Capacity	Btu/h 5,320	6,520
Heating Capacity (min./rated/max.)	Btu/h 4,400/10,000/11,600	4,400/12,000/16,400
Heating Capacity (at 17°F)	Btu/h 6,000	6,900
Airflow-Wet (H/M/L/SL)	cfm 325/261/187/141	328/272/198/155
Airflow-Dry (H/M/L/SL)	cfm 342/286/226/198	357/297/237/208
Sound Pressure Level - Cooling (H/M/L/SL)	dB(A) 40/33/26/22	41/34/27/23
Sound Pressure Level - Heating (H/M/L/SL)	dB(A) 40/34/28/25	41/35/29/26
Condensate Drain Connection (O.D.)	in. ø 5/8	ø 5/8
Dimensions (H x W x D)	in. 11-1/8 x 30-1/4 x 7-3/4	
Net Weight	lbs. 16	16
Gross Weight	lbs. 24	24
Wireless Remote Controller (standard)	ARC452A12	ARC452A12
Wired Remote Controller (optional) with 26 ft. cable	BRC944B2-A08	BRC944B2-A08
Optional Condensate Pump	DACA-CP1-1	DACA-CP1-1

Outdoor Units - RKS_JEVJU

Model	RKS09JEVJU	RKS12JEVJU
Casing Color	Ivory White	Ivory White
Refrigerant	R-410A	R-410A
Power Source	1ph 208/230V 60Hz	1ph 208/230V 60Hz
Max. Fuse Size	A 15	15
Compressor Type	Hermetically sealed swing type compressor	
Compressor Motor Output	W 750	750
Power Consumption-Cooling (system)	W 680	800
Operating Current-Cooling (system)	A 4.1-3.7	4.1-3.7
Sound Pressure Level (cooling)	dB(A) 48	48
Operating Range-Cooling (outdoor)	°F DB 50 - 115	50 - 115
Pipe Connections-Liquid (flare type)	in. ø 1/4	ø 1/4
Pipe Connections-Gas (flare type)	in. ø 3/8	ø 3/8
Refrigerant Charge	lbs. 2.2	2.2
Max. Piping Length	ft. 49	49
Piping Length (no add'l refrigerant)	ft. 33	33
Max. Height Difference	ft. 39	39
Dimensions (H x W x D)	in. 21-5/8 x 25-7/8 x 10-7/8	
Net Weight	lbs. 66	66
Gross Weight	lbs. 75	75
Condenser Mounting Bracket Accessory	DACA-WB-3	DACA-WB-3

Outdoor Units - RXS_JEVJU

Model	RXS09JEVJU	RXS12JEVJU
Casing Color	Ivory White	Ivory White
Refrigerant	R-410A	R-410A
Power Source	1ph 208/230V 60Hz	1ph 208/230V 60Hz
Max. Fuse Size	A 15	15
Compressor Type	Hermetically sealed swing type compressor	
Compressor Motor Output	W 750	750
Power Consumption-Cooling (system)	W 680	800
Power Consumption-Heating (system)	W 775	930
Operating Current-Cooling (system)	A 4.1-3.7	4.1-3.7
Operating Current-Heating (system)	A 4.0-3.6	4.8-4.3
Sound Pressure Level (cooling/heating)	dB(A) 48/48	48/49
Operating Range-Cooling (outdoor)	°F DB 50 - 115	50 - 115
Operating Range-Heating (outdoor)	°F DB 5 - 77	5 - 77
Pipe Connections-Liquid (flare type)	in. ø 1/4	ø 1/4
Pipe Connections-Gas (flare type)	in. ø 3/8	ø 3/8
Refrigerant Charge	lbs. 2.2	2.2
Max. Piping Length	ft. 49	49
Piping Length (no add'l refrigerant)	ft. 33	33
Max. Height Difference	ft. 39	39
Dimensions (H x W x D)	in. 21-5/8 x 25-7/8 x 10-7/8	
Net Weight	lbs. 68	68
Gross Weight	lbs. 77	77
Condenser Mounting Bracket Accessory	DACA-WB-3	DACA-WB-3

Certified Efficiency Performance Values

AHRI Number	Outdoor Model	Indoor Model	EER	SEER
3698086	RKS09JEVJU	FTKS09JEVJU	12.5	18.0
3700898	RKS12JEVJU	FTKS12JEVJU	12.5	18.0

Certified Efficiency Performance Values

AHRI Number	Outdoor Model	Indoor Model	EER	SEER	COP	HSPF
3696299	RXS09JEVJU	FTXS09JEVJU	12.5	18.0	3.78	10.0
3696303	RXS12JEVJU	FTXS12JEVJU	12.5	18.0	3.78	10.0

*Not available on FTKS models