

Submittal Data: System 12RQ ASU12RQ & AOU12RQ



Job Name: _____ Location: _____
 Purchaser: _____
 Engineer: _____
 Submitted To: _____ For: Reference Approval Construction
 Submitted By: _____
 Unit Designation: _____ Schedule No. _____ Model No.: _____

Capacities:

Cooling	12,300 BTU/h
Outdoor Design Temperature	F° DB/WB 95/ 75
Heating	12,800 BTU/h
Outdoor Design Temperature	F° DB/WB 47/ 43
SEER	13.7

Indoor Unit:

Power Supply	115 V
Noise Level db (A) - H/ M/ L/ Q	45/ 40/ 35/ 28
Weight	21 lbs.


Outdoor Unit:

Power Supply	115 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current <i>Cooling</i>	9.9A
Running Current <i>Heating</i>	9.2A
Weight	79 lbs.

Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Total or Combined Length	49 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

OUTLINE AND DIMENSIONS

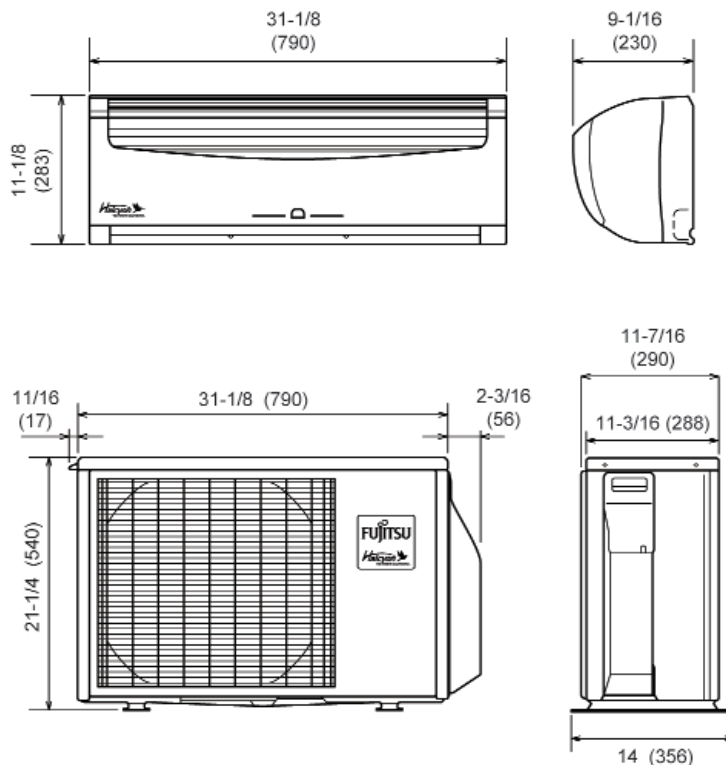

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 4 Way Auto Louver function
- ◆ Built in Low Ambient to 32° F
- ◆ Auto Restart/ Reset
- ◆ Programmable Timer
- ◆ Optional Wired Remote Control
- ◆ Plasma Filter
- ◆ Refrigerant R-410A

Notes:

